

## CSA-2120

#### Amplifier For JBL Commercial Solutions Series Public Address System




The JBL Commercial® CSA-2120 power amplifier is a professional tool designed and built for installed sound applications. The amplifier is two-channel model providing simple analog front-end processing, with a switch-mode universal power supply.

The amplifier includes two optional accessories: rack mounting kit and transformer module. With the rack mounting kit, you can install the amplifier to a cabinet or wall. If your loudspeaker system requires higher impedance, the transformer module can be connected between the amplifier and loudspeaker systems to obtain the impedance matching.

#### **Features**

- Two input channels and two output channels, Power of each channel: 120W
- Output impedance of each channel:  $4\Omega$  and  $8\Omega$
- High power output, compact size, light weight
- Accurate, uncoloured sound with very low distortion for the best in music and voice
- Over heat auto protection
- Low voltage auto protection
- The auto-standby mode allows the amplifier to save energy by disabling the amplifier pulse width modulation generator when there is no input signal
- Detachable Euroblock input and output
- Switch-mode universal power supply

### Line drawing

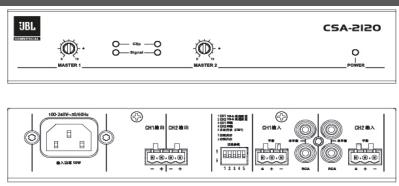



# CSA-2120

### Amplifier For JBL Commercial Solutions Series Public Address System

#### **CSA-2120 Specifications**

Output Power: 4 ohms / 8 ohms 120 W (two channels at 1 kHz power, THD+N<0.5%)

Frequency Response: +/- 1dB (At 1watt into 4 or 8 ohms)

Load Impedance: Rated for 4 or 8 ohms

Sensitivity (8 ohms load): 1.4 Vrms

Signal to Noise Ratio: >100 dB (below rated 8-ohm power at 1 kHz, A weighted)

**Crosstalk (A weighted):** 70 dB below rated from 20 Hz to 1 kHz;

50 dB below rated at 20 kHz

**Input Impedance :** Balanced: 20 k ohms (nominal)

Unbalanced: 10 k ohms (nominal)

**AC Line Voltage and** 

**Frequency Configurations** 

**Available:** 100-240 V, 50/60 Hz

Maximum Input Signal: +20 dBu typical

Operating Temperature: 0° C to 40° C at 95% relative humidity (non-condensing)

**Dimensions (W x H x D):** 8.2" x 1.7 x 7" (209 mm x 44 mm x 178 mm)

**Shipping Weight:** 1.5 KG (3.4 lbs) (Rack mounting kit attached forunits with the part number

"NCSA2120R-U-CN")

1.3 KG (2.9 lbs) (No rack mounting kit attached for units with the part

number "NCSA2120-U-CN")

Contact Information

**Ordering Information** 

On The World Wide Web: CSA-2120

www.jblcommercialproducts.com

**Professional Contacts, Outside the USA:** 

Contact the JBL Professional Distributor in your area. A complete list of JBL Professional international

distributors is provided at our U.S.A. website:

www.jblcommercialproducts.com Issue: 03/20