

PM-6200 Powered Mixer



Highlights



USB Thumbdrive Player and Recorder



Bluetooth Playback



LIVE Grade Effect Engine


Descriptions

Too big and too heavy? Fret not! IVA PM Series got you covered. IVA PM-6200 expands the usability of PM Series powered mixer to smaller scale venue and event. So keep those heavy and professional looking power mixer to the professional. This consumer usage friendly power mixer still pack a punch and great in sonic quality with professional results. We retain the same TRUE POWER of 250W at 4 ohm load. We keep useful features like audio effect, MP3 player and Bluetooth player intact. Outlook design is was altered to tailor your hands coordination while still retains the slanting design.

Features

- 6 Mono Inputs Channels with silver plated XLRs and balanced Line Input
- Ultra-low noise LIVE grade Mic Preamps with + 48 V Phantom Power
- Ultra-musical 2 band EQ on all channels
- Peak LEDs all Mono Channels
- Single LIVE Grade 16bit DSP Effect Engine
- 1 Aux Send or FX Send per channel for external processing and outputs
- Single 5-band equalizer
- Highly accurate 5 segment Bargraph Meters
- 1 Stereo Master output
- LIVE Grade Playback USB Thumbdrive
- Bluetooth Connectivity for Smartphone playback


PM-6200 Powered Mixer

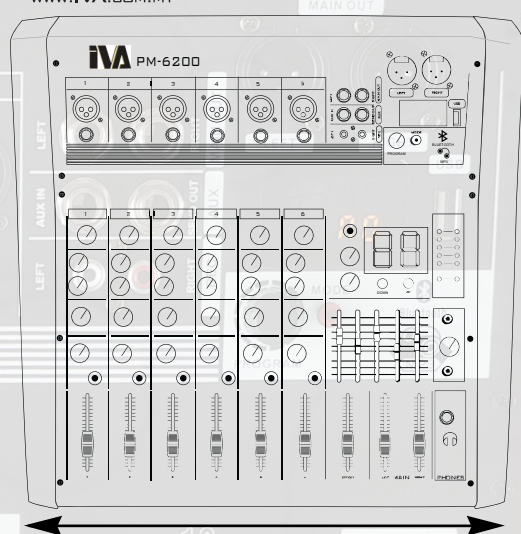

12cm

14cm

24cm

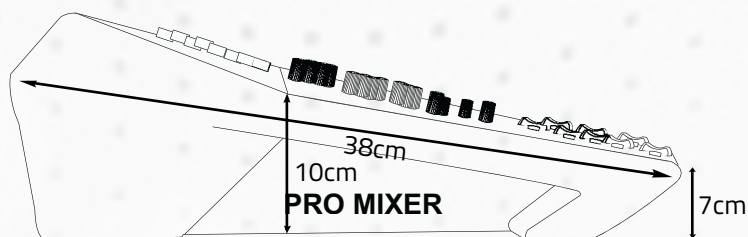

01 12.3 MS	09 110.6 MS
02 24.6 MS	10 122.9 MS
03 36.9 MS	11 135.2 MS
04 49.2 MS	12 147.5 MS
05 61.4 MS	13 159.7 MS
06 73.7 MS	14 172.0 MS
07 86.0 MS	15 184.3 MS
08 98.3 MS	16 196.6 MS

SPECIFICATIONS

Mono Inputs

Mic Inputs

6 Electronically balanced discrete input configuration

Bandwidth

10 Hz to 60 kHz +/- 3 dB

Distortion (THD & N)

0.01% at +4 dBu, 1 kHz, bandwidth 8- kHz

Mic E.I.N (22 Hz – 22 kHz)

- 122.0 dBqp, input shorted
- 129.5 dBu, 150 Ohm source
- 117.3 dBqp, 150 Ohm source
- 132.0 dBu, input shorted

GAIN / TRIM range

- 45 dB + 4 dB

Line Input

6 Mono Electronically balanced

Bandwidth

10 Hz to 60 kHz ± 3dB

Distortion (THD & N)

0.01% at +4 dBu, 1kHz, Bandwidth 8- kHz

Line Level Range

- 45dB to + 4dB

MP3/Bluetooth Level Range

- 45dB to + 4dB

Equalization

Hi

12 kHz +/- 15 dB

Hi Mid

-

Low

80 Hz +/- 15 dB

Master Mix Section

Max Output

+22 dBu

Aux Send Max Out

+22 dBu

Signal-To-Noise ratio

112 dB, all channels at Unity Gain

TRUE POWER Output

2 x 250W 4 ohm, 2 x 110W 8 Ohm

Power Supply

Main Voltages

U.K / Australia / Malaysia ~ 240 V AC, 50 Hz

Weight

Net Weight

7.5kg

Gross Weight

8.4kg

. The manufacturer reserves the right to make changes or improvements in manufacturing or design which may affect specifications.

PM-6200 Powered Mixer



Front View



Side View



Rear View