



Professional Public Address System

## WS-9xx Series Series Aluminium Column Speaker



### TECHNICAL SPECIFICATIONS


	WS-910	WS-920	WS-930	WS-940
<b>Loud Speaker</b>	3inch x 1 2inch x 1	3inch x 2 2inch x 1	3inch x 3 2inch x 1	3inch x 4 2inch x 2
<b>Input</b>	5W / 10W	10W / 20W	15W / 30W	20W / 40W
<b>Frequency Response</b>	150 - 13,000Hz	150 - 13,000Hz	150 - 13,000Hz	150 - 13,000Hz
<b>Impedance</b>	2kΩ / 1kΩ	1kΩ / 500Ω	666Ω / 333Ω	500Ω / 250Ω
<b>S.P.L. (at 1w/1m ±3dB)</b>	88dB	91dB	93dB	96dB
<b>Dimensions(W x D x H)</b>	105 x 114 x 213mm	105 x 114 x 308mm	105 x 114 x 406mm	105 x 114 x 593mm
<b>Weight(kg)</b>	1.53kg	2.33kg	3.23kg	4.23kg

(SplashProof - For use under Roof Eaves)


SPL - Sound Pressure Level

Finish - Enclosure; Extruded aluminium, Black Grille; Punched net, Black

Column Speaker Directivity

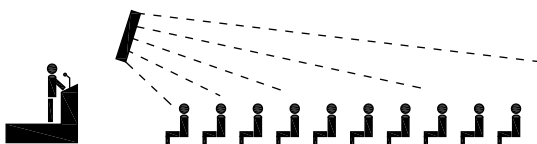

Ordinary Speaker Directivity

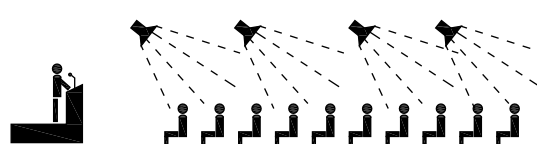

#### Column Speaker Directivity

Column Speaker are mounted vertically, so they disperse the sound evenly and widely over the audience



Specifications and design are subjected to change without notice for improvements.