



2 - way Loudspeaker

Power Punch Performance



SPEAKERS

RX-10MK2

RX-12MK2

RX-15MK2

2 - Way Loudspeakers

How to top a speaker product which already very good quality at entry level price tag? Based on IVA rX Series, the MK2 version expands the flexibility of rigging the system, improve the power handling and a truly multipurpose cabinet design. All of these new addition of features come even a lower price tags. With high clarity and tight punch, the performance outperform many others entry level speakers in market. Powerful long-excursion LF drivers and high performance compression drivers combined with optimized electronics specially engineered to deliver a highly professional product to entry-level users




rX-10MK2 / rX-12MK2 / rX-15MK2

2-ways Loudspeaker


FEATURES

- Powerful and improved drivers to delivers incredible acoustic and higher SPL
- High performance and improved compression driver for powerful high frequencies capable of long throw applications
- Elegant design with highly durable paint finishing
- High quality 15mm MDF wood cabinet
- Improved sturdy grill with backbone design
- Internal foam panel for protection against elements
- Industry Standard Speakon Connectors
- Integral Metal Tripod Stand / Pole Adapter
- Engineered in Malaysia


rX-10MK2

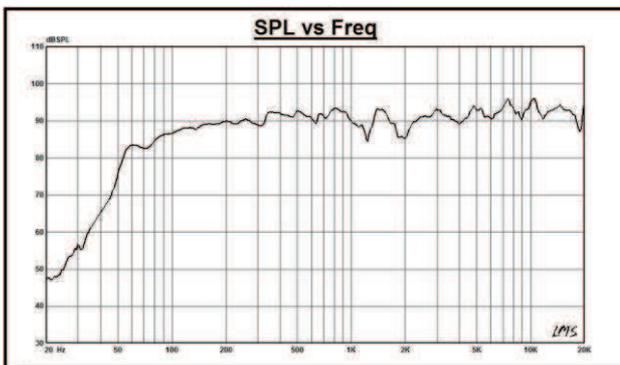

rX-12MK2

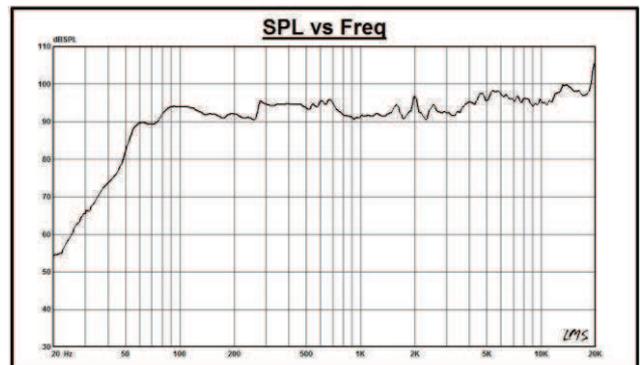

rX-15MK2

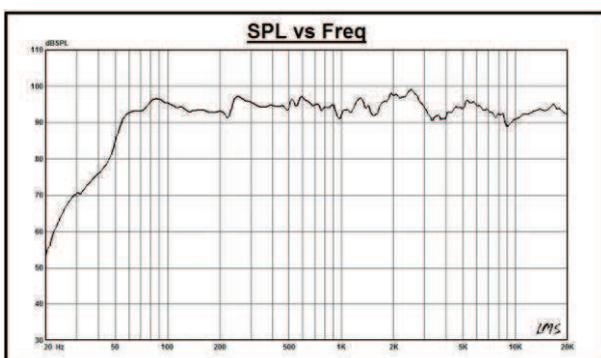





rX-10MK2 / rX-12MK2 / rX-15MK2

2-ways Loudspeaker


rX-10MK2



Front




Side




Top


rX-12MK2



Front




Side




Top


rX-15MK2

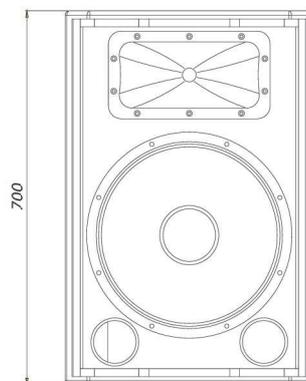

Front

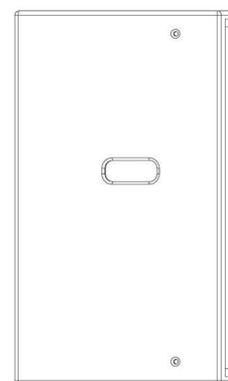

Side



Top



rX-10MK2 / rX-12MK2 / rX-15MK2

2-ways Loudspeaker

Model	rX-10MK2	rX-12MK2	rX-15MK2
Description	10" 2 Way	12" 2 Way	15" 2 Way
Frequency Response (Hz), -3dB	90 Hz ~ 17kHz	63 Hz~ 20 kHz	60 Hz ~ 20 kHz
Sensitivity (1W 1m +/- 3dB)	98 dB	96 dB	97 dB
Peak SPL @ 1m	126 dB	126 dB	127.8 dB
RMS Power	160W	250W	300W
Program Power	320W	500W	600W
Peak Power	640W	1000W	1200W
Nominal Impedance	8 Ohm	8 Ohms	8 Ohms
Crossover Frequency (Hz)	1750 Hz	2200 Hz	2200 Hz
Dispersion Angle (H x V)	90 x 40 degree	90 x 40 degree	90 x 40 degree
Dimension (W x D x H)	352.1 x 320 x 520 mm	395 x 360 x 600 mm	480 x 420 x 700 mm
Weight	17.2 kg	15 kg	23 kg

• The manufacturer reserves the right to make changes or improvements in manufacturing or design which may affect specifications.

Best Compatible System



rX-10MK2

Compatible for 1 unit or 2 unit of rX-10MK2 each side.



rX-12MK2

Compatible for 1 unit or 2 unit of rX-12MK2 each side.



rX-15MK2

Compatible for 1 unit or 2 unit of rX-15MK2 each side.



rX-12MK2 / rX-15MK2

SUB-118B

Compatible for 1 unit or 2 unit of rX-12MK2 / rX-15MK2 each side.